

INSTALLATION SHEET



1 Uncrating and Positioning

The iClean Dog Wash is boxed with care to prevent damage to the unit during shipping. Upon receiving the unit, carefully remove the box and dispose of properly. DO NOT use a razor knife when removing the box to prevent possible damage to decaling or stainless-steel surface. Remove the Kick Panel by the 2 bolts that hold the panel in place. The unit is mounted on the pallet that is held in place with 4 lag bolts. Prior to removing the pallet, it is recommended to position the unit in close proximity of its final location. Remove the lag screws in the pallet to remove it and position the unit into the final location leaving adequate room to access the unit to connect to water, electricity, and sanitary sewer.



2 Leveling Unit

There are four leveling feet on the bottom of the unit. You will want to level the unit both front to back and side to side. First place the level on the wash compartment door and adjust the feet to level the unit side to side. Then place the level on the top of the cabinet and adjust the feet to level front to back. Note it is acceptable for the front to be slightly higher than the back.



3 Utility Connections



A qualified installer must perform all utility connections; failure to do so may cause injury or equipment damage. Any equipment damage done due to incorrect installation and hookup will void warranty.

1 Sanitary Sewer

All plumbing connections should follow the local and national plumbing codes and requirements. A 2" (40 mm) sanitary sewer connection is required for drainage. Remove the 2 bolts holding the front access panel to the unit, remove access panel taking caution not to damage the power cable in case the Dog Wash units is equipped with a kick panel with a LED panel. The drain is located in the center of the dog wash compartment 4 - 6" (10 - 15 cm) above the surface of the floor. Connect the provided 2" (40 mm) sanitary connection to the unit's drain.

2 Water

Adequate water lines should be used that will support the necessary water pressure needed. 1/2" (20 mm) pipe thread fittings are provided on the unit for water supply connections. Connect water supply lines to these fittings. The water line needs a pressure of 20-60 PSI/2.0 GPM (1.5 - 2.5 bar)

3 Electrical

A qualified electrician should only make the electrical connections to the unit. Provide a 110 V AC, 20 Amp (Europe: 230V, 16 Amp) dedicated circuit to the unit. Observe all local and national codes when providing power to the unit. This circuit is for the unit alone, no other appliance should be connected to this circuit.




Plug-and-play Installation time only 1.5 hours!



Dimensions & position Utility Connections

BASIC

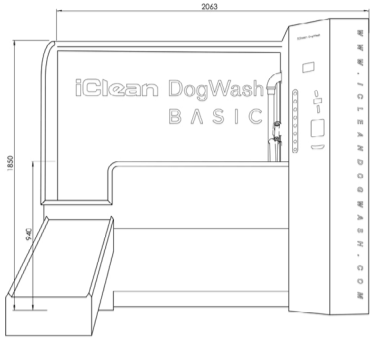

Dimensions

- Length 81.5" (207 cm)
- Height 72.8" (185 cm)
- Depth 35.0" (89 cm)
- Depth 68.1" (173 cm) -> with ramp
- Weight: 750 pounds (340 kg)

Position Drain Connection

- From left side: 29.5" (75 cm)
- From backwall: 13.8" (35 cm)
- Minimum height bottom pipe from floor: 4 - 6" (10 - 15 cm)


Position Water & Electrical Connection

- From left side: 61.0" (155 cm)
- From backwall: 5.9" (15 cm)
- Height from floor: 8.0" (20 cm)



The door of the technical cabinet is on the right side
- Minimum free space on right to open door: 26.4" (67 cm)

CLASSIC

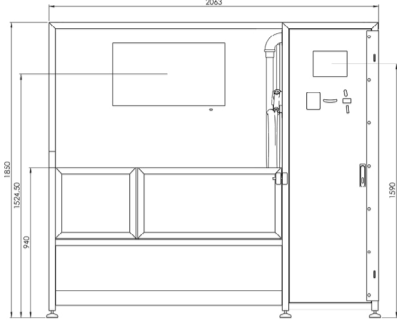

Dimensions

- Length 81.5" (207 cm)
- Height 72.8" (185 cm)
- Depth 23.6" (60 cm)
- Option NAYAX: 1.9" (5 cm) extra depth
- Option TV: 4.7" (12,5 cm) extra depth
- Weight: 750 pounds (340 kg)


Position Drain Connection

- From left side: 29.5" (75 cm)
- From backwall: 17.3" (44 cm)
- Minimum height bottom pipe from floor: 4 - 6" (10 - 15 cm)

Position Water & Electrical Connection

- From left side: 57.0" (145 cm)
- From backwall: 8.7" (22 cm)
- Height from floor: 8.0" (20 cm)

CLASSIC PRO

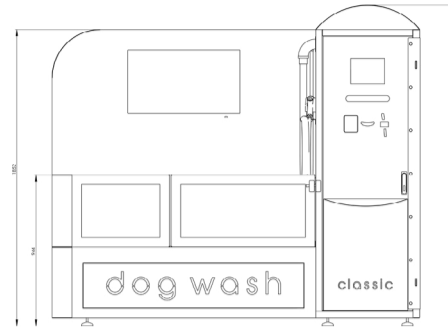

Dimensions

- Length 90.6" (230 cm)
- Height 78.7" (200 cm)
- Depth 27.5" (70 cm)
- Option TV: 4.7" (12,5 cm) extra depth
- Weight: 750 pounds (340 kg)


Position Drain Connection

- From left side: 37.4" (95 cm)
- From backwall: 17.3" (44 cm)
- Minimum height bottom pipe from floor: 4 - 6" (10 - 15 cm)

Position Water & Electrical Connection

- From left side: 65.0" (165 cm)
- From backwall: 5.9" (15 cm)
- Height from floor: 8.0" (20 cm)

CyberWash

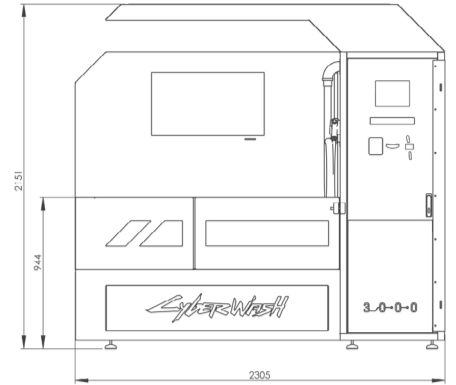

Dimensions

- Length 90.6" (230 cm)
- Height 84.7" (215 cm)
- Depth 27.5" (70 cm)
- Option TV: 4.7" (12,5 cm) extra depth
- Weight: 750 pounds (340 kg)


Position Drain Connection

- From left side: 37.4" (95 cm)
- From backwall: 17.3" (44 cm)
- Minimum height bottom pipe from floor: 4 - 6" (10 - 15 cm)

Position Water & Electrical Connection

- From left side: 65.0" (165 cm)
- From backwall: 5.9" (15 cm)
- Height from floor: 8.0" (20 cm)

XL

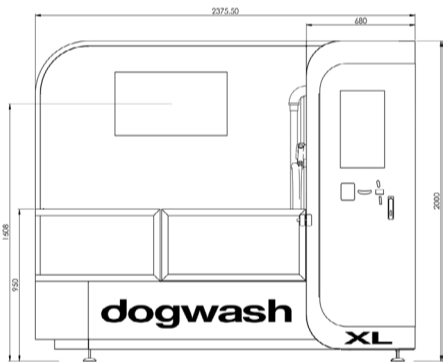

Dimensions

- Length 93.5" (237.5 cm)
- Height 78.7" (200 cm)
- Depth 27.5" (70 cm)
- Option NAYAX: 1.9" (5 cm) extra depth
- Option TV: 4.7" (12,5 cm) extra depth
- Weight: 860 pounds (390 kg)


Position Drain Connection

- From left side: 33.9" (86 cm)
- From backwall: 20.1" (51 cm)
- Minimum height bottom pipe from floor: 5 - 7" (12 - 17 cm)

Position Water & Electrical Connection

- From left side: 65.8" (167 cm)
- From backwall: 8.7" (22 cm)
- Height from floor: 9.9" (25 cm)

FUTURA

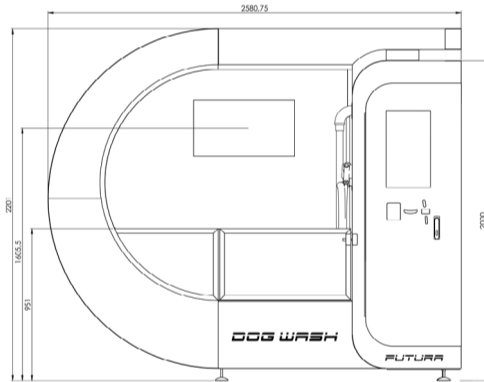

Dimensions

- Length 101.6" (258.1 cm)
- Height 86.6" (220 cm)
- Depth 27.5" (70 cm)
- Option NAYAX: 1.9" (5 cm) extra depth
- Option TV: 4.7" (12,5 cm) extra depth
- Weight: 968 pounds (440 kg)


Position Drain Connection

- From left side: 41.8" (106 cm)
- From backwall: 20.1" (51 cm)
- Minimum height bottom pipe from floor: 5 - 7" (12 - 17 cm)

Position Water & Electrical Connection

- From left side: 74.4" (189 cm)
- From backwall: 8.7" (22 cm)
- Height from floor: 9.9" (25 cm)

CUBE

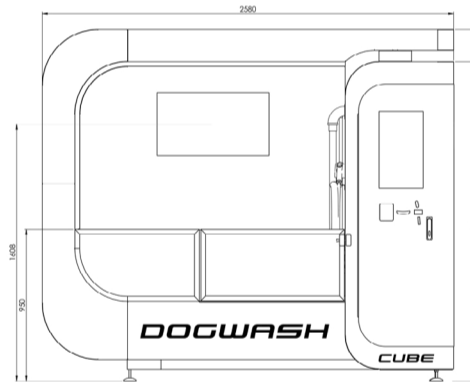

Dimensions

- Length 101.6" (258.1 cm)
- Height 86.6" (220 cm)
- Depth 27.5" (70 cm)
- Option NAYAX: 1.9" (5 cm) extra depth
- Option TV: 4.7" (12,5 cm) extra depth
- Weight: 968 pounds (440 kg)


Position Drain Connection

- From left side: 41.8" (106 cm)
- From backwall: 20.1" (51 cm)
- Height bottom pipe from floor: 5 - 7" (12 - 17 cm)

Position Water & Electrical Connection

- From left side: 74.4" (189 cm)
- From backwall: 8.7" (22 cm)
- Height from floor: 9.9" (25 cm)

spdo

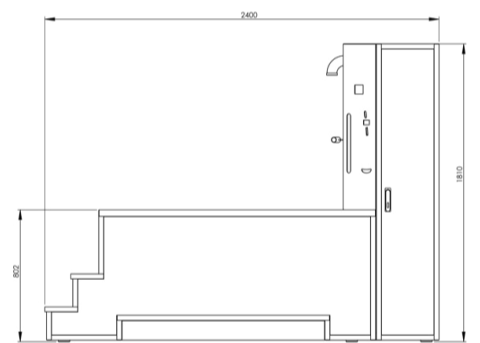

Dimensions

- Length 94.5" (240 cm)
- Height 72.8" (185 cm)
- Depth 41.0" (105 cm)
- Weight: 750 pounds (340 kg)

Position Drain Connection

- On the right side (this view)
- From back (this view) 20.5" (52,5 cm)
- Height bottom pipe from floor: 8.0" (20 cm)

Position Water & Electrical Connection

- On the right side (this view)
- From back (this view) 20.5" (52,5 cm)
- Height from floor: 8.0" (20 cm)

Contact

iClean International B.V.
Keizersveld 58
5803 AN Venray
The Netherlands

+31 (0) 478 51 79 79
info@icleandogwash.com
www.icleandogwash.com